



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

10 / 517902

10 DEC 2004

REC'D 03 OCT 2003

WIPO

PCT

Bescheinigung

Certificate

Attestation


Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

02018940.3

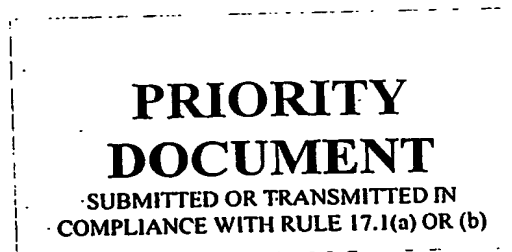

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.

R C van Dijk

BEST AVAILABLE COPY



Anmeldung Nr:  
Application no.: 02018940.3  
Demande no:

Anmeldetag:  
Date of filing: 26.08.02  
Date de dépôt:

Anmelder/Applicant(s)/Demandeur(s):

Sony Ericsson Mobile Communications AB

221 88 Lund  
SUEDE

Bezeichnung der Erfindung/Title of the invention/Titre de l'invention:  
(Falls die Bezeichnung der Erfindung nicht angegeben ist, siehe Beschreibung.  
If no title is shown please refer to the description.  
Si aucun titre n'est indiqué se référer à la description.)

Wideband antenna device

In Anspruch genommene Priorität(en) / Priority(ies) claimed /Priorité(s)  
revendiquée(s)

Staat/Tag/Aktenzeichen/State/Date/File no./Pays/Date/Numéro de dépôt:

EP/13.06.02/EP 02013085

Internationale Patentklassifikation/International Patent Classification/  
Classification internationale des brevets:

H01Q/

Am Anmeldetag benannte Vertragsstaaten/Contracting states designated at date of  
filing/Etats contractants désignées lors du dépôt:

AT BE BG CH CY CZ DE DK EE ES FI FR GB GR IE IT LI LU MC NL PT SE SK TR

EPO - Munich  
22

26. Aug. 2002

**WIDEBAND ANTENNA DEVICE****Technical Field**

5       The present invention relates to an antenna device  
for use in a small portable device. More specifically, the  
invention relates to a wideband antenna having sufficient  
efficiency for meeting the requirements of different  
communications protocols. Also, the antenna reduces the  
10   power consumption of the small portable device so it can  
operate longer on a small battery.

**Known Prior Art**

Examples of a small portable device is e.g. a headset  
15   for wireless communication through an antenna with a mobile  
communication apparatus, such as a mobile telephone, a  
Bluetooth device, or any portable or stationary electronic  
device. A small portable device is, as indicated,  
characterized in that it is small and light. Therefore, it  
20   is preferred if the antenna used in such a device is small,  
light, and efficient. The small portable device may  
communicate using a communication protocol, such as the  
Bluetooth, the WLAN (Wireless Local Area Network), the UMTS  
(Universal Mobile Telecommunications System), or the GSM  
25   (Global System for Mobile communications) protocol.

One example of an antenna for a small portable device  
is a monopole antenna, which extends out of the product.  
Another solution is a PIFA (Planar Inverted F Antenna)  
antenna. However, there are several drawbacks of these  
30   antennas. To achieve sufficient bandwidth to meet the  
requirements of known communication protocols, e.g.  
according to above, the known antennas all need ground  
planes, which are too big to fit in a small portable  
device.

~~There are a number of problems with the known prior~~  
art antennas, which make them unsuitable for use in a small portable device.

5 Firstly, the size of the small portable device causes problems for the antenna design, as it entails limited battery capacity. This means that the antenna should have a high efficiency in order not to waste battery power. Small antennas have lower efficiency than big antennas. As the device is small, the ground plane will also be small. An  
10 antenna requires a certain ground plane size to achieve a certain bandwidth, which is necessary for the antenna to be able to operate under a specific communications protocol, which always requires a certain bandwidth.

15 Secondly, since cost is often important for a small portable device it is important that the antenna can be made cheaply, which is not always the case with the antennas known in the art.

20 Thirdly, because of the small nature of the small portable device, other parts of the device will be very close to the antenna, which can have a negative influence on the antenna performance. Especially conducting materials like batteries, knobs or ESD (electrostatic discharge) means can have a very negative influence on the antenna performance. Therefore, the antenna has to work well in  
25 this environment, which is also not possible with the antennas according to the known prior art.

#### Summary of the Invention

30 Therefore, the object of the present invention is to provide an antenna device, which is sufficiently small to fit in small portable devices and which has efficiency and bandwidth to meet requirements of known and future communications protocols.

35 The above objects are achieved by an antenna device for a portable device, which comprises a folded antenna

loop of conducting material having first and second ends to be connected to radio frequency (RF) circuitry and a ground plane of a PCB, respectively. Further, the antenna device comprises a ground plane extender positioned in the extension of a first side of the PCB. In one embodiment of the invention, the antenna extender is at least one battery casing of a battery cell having a position to serve as an extension of the ground plane of the PCB.

The antenna loop comprises first and second connectors provided at a second side of the PCB for connecting the antenna loop to the RF circuitry and the ground plane of the PCB, respectively.

Further, the antenna loop comprises:

a first portion having a first and a second end, said portion extending in a first direction along a third side of the PCB, the first end being connected to the RF circuitry of the PCB;

a second portion having a first and a second end, the first end of the second portion being connected to the second end of the first portion, said second portion extending in a second direction from the third side of the PCB towards a fourth side of the PCB, which is opposite the said third side; and

a third portion having a first and a second end, the first end of the third portion being connected to the second end of the second portion and the second end of the third portion being connected to the ground plane of the PCB, said third portion extending in the direction opposite to said first direction along said fourth side of the PCB.

In one embodiment, the PCB of the antenna device is a multi layer PCB having one layer used as a dedicated RF ground plane, which also serves as the ground plane of the antenna device. The antenna loop is positioned opposite a first or a second surface of the PCB.

~~The material of the antenna loop is any well~~  
conducting material, such as metal. In an alternative  
embodiment, the antenna loop is provided as a U-shaped  
dielectric having the antenna shape etched into the  
5 dielectric. Still another embodiment is to provide the  
antenna loop inside the PCB as an element thereof.

Additionally, the antenna device may be provided with  
a bezel, which is connected to the PCB, for fending off ESD  
(Electrostatic Discharges) discharges. The bezel extends  
10 from the third side of the PCB towards the fourth side of  
the PCB. Also, to improve ESD robustness, the antenna  
device may be provided with bezel flanges connected to the  
ground plane of the PCB, which extends along the third and  
fourth sides of said PCB.

15 A further object of the invention is to provide an  
PCB comprising an antenna device, which is sufficiently  
small to fit in small portable devices, and which has good  
performance to meet requirements of communications  
protocols.

20 The above objects are achieved by a multi-layer  
printed circuit board (PCB) comprising an antenna device  
according to the above.

Finally, it is an object of the invention to provide  
a portable communication device having an antenna with good  
25 performance and being sufficiently small to fit into a  
small portable device. The efficiency of the antenna device  
should be high to keep the power consumption low. As should  
be noticed, it is a further important object of the antenna  
according to the invention to provide high bandwidth to  
30 meet said requirements of communication protocols.

A portable device comprising the antenna device  
according to above achieves the above objects. In one  
embodiment, the portable communication device is a headset.

35 An advantage of an antenna device according to the  
present invention is that it is sufficiently small to fit

into small portable devices and still provides good efficiency and high bandwidth. Therefore, the antenna device can be adapted to meet requirements of several different communications protocols. Also, as the PCB of the antenna device may be decreased, the weight and the cost of the antenna device are also decreased.

Further preferred features of the invention are defined in the dependent claims.

It should be emphasized that the term "comprises/comprising" when used in this specification is taken to specify the presence of stated features, integers, steps, components or groups thereof.

#### Brief Description of the Drawings

A preferred and alternative embodiments of the present invention will be described in the following detailed disclosure, reference being made to the accompanying drawings, in which:

Fig. 1 illustrates a small portable device embodied as a headset;

Fig. 2 shows a general embodiment of the antenna device according to the invention;

Fig. 3 shows a second embodiment of the antenna device according to the invention;

Fig. 4 shows a third embodiment of the antenna device according to the invention;

Fig. 5 shows a mag-log diagram of a measurement made on a prototype of the embodiment of Fig. 3; and

Fig. 6 shows a Smith chart of a measurement made on a prototype of the embodiment of Fig. 3.

#### Detailed Disclosure of Embodiments

In Fig. 1 is a small portable communication device illustrated as a headset 1, which is adapted for wireless communication with a mobile telephone 2. The small portable

~~device could be any electronic communication device, which~~  
has to be small to meet user preferences and which is  
adapted to communicate wirelessly with another  
communication device, which may be stationary or portable.

5 In the following, reference will be made to a headset  
1 and a mobile telephone 2. However, this is only for  
convenience and the illustrated headset 1 and mobile  
telephone 2 are only for exemplifying purposes and should  
not be taken as limiting the scope of the invention.

10 The headset 1 comprises a microphone 3 and a  
loudspeaker 4, through which a user of the headset 1 may  
receive and transmit speech to the mobile telephone 2  
through a wireless connection 5. Also, it is equally  
possible to communicate any data between the small portable  
15 device and the mobile telephone 2.

In Fig 2 a first general embodiment of an antenna  
device 10 according to the invention is shown, which may be  
positioned in the proximity of the loudspeaker 4 of Fig 1.  
The antenna device 10 comprises a half-wave folded antenna  
20 loop 11 having first 12, second 13, and third 14 portions,  
respectively, each having a first and a second end. A first  
connector 15a is connected to the first end of the first  
portion 12, and a second connector 15b is connected to the  
second end of the third portion 14. The first end of the  
25 second portion 13 is connected to the second end of the  
first portion 12, and the second end of the second portion  
13 is connected to the first end of the third portion 14.  
In fig. 2, the antenna loop 11 is provided opposite a first  
front surface of the PCB 16. However, the antenna loop 11  
30 may equally be positioned opposite a second rearwardly  
facing surface of the PCB 16.

The antenna loop 11 is connected, through the  
connectors 15a, 15b, to radio circuitry and a ground plane  
within the PCB 16, respectively. The PCB 16 can be made out  
35 of any known PCB, as long as one layer is used as a

dedicated RF (Radio Frequency) ground plane, which also serves as the ground plane of the antenna device 10. The connectors may be a part of the antenna loop 11 connected to the PCB 16 via holes provided in the PCB. The connectors  
5 may be provided at an angle  $\alpha$  in relation antenna loop 11 and the PCB 16. This will shorten the total length of the antenna device compared to if the angle  $\alpha$  is  $90^\circ$ . If the connectors are provided essentially perpendicular to the PCB 16, the total length of the antenna is longer. However,  
10 if the connectors are folded with the angle  $\alpha$  the antenna solution is made shorter without effecting the antenna performance.

Batteries 17a, 17b are positioned at a first side of the PCB 16. The position of the batteries 17a, 17b in  
15 relation to the PCB 16 and the connectors 15a, 15b is important for the performance of the antenna device 10, as will be further explained below. In Fig. 2, two batteries 17a, 17b are shown. However, any suitable number of batteries may be utilized, depending on the actual  
20 configuration. The batteries 17a, 17b can be of any configuration, technology or size suitable with the headset 1, as long as they are provided in a battery casing.

The antenna device 10 is a loop antenna, wherein the antenna loop 11 is made out of a metal, such as copper.  
25 However, any well conducting material can be used. As an alternative embodiment, the antenna loop could be provided as a loop on one layer of a multi-layer PCB 16. Still another embodiment is to provide the antenna loop 11 as a component formed as a U-shaped dielectric with the antenna  
30 loop etched into it (like a thick PCB), making it suitable for SMT (Surface Mounted Technology) pick and place machines. As is shown in Fig 2, the first connector 15a is connected to the PCB at a second side thereof, which is opposite the first side of the PCB 16.

The first portion 12 extends along a third side of  
the PCB 16 towards the first side of the PCB. The second  
portion 13 extends from the second end of the first portion  
12 towards a fourth side of the PCB 16. Finally, the third  
5 portion 14 extends from the second end of the second  
portion 13 along the fourth side of the PCB 16 towards the  
second antenna connector 15b, which is connected to the PCB  
16 at the second side thereof.

The shape of the antenna loop 11 is not fixed, as can  
10 be seen from a second embodiment shown in Fig. 3. Like  
numerals of Fig. 3 correspond to like numerals of Fig. 2.  
Consequently, the antenna connectors 15a, 15b of Fig. 2  
correspond to antenna connectors 25a, 25b of Fig. 3, the  
antenna loop 11 of Fig. 2 corresponds to an antenna loop 21  
15 of Fig. 3 etc. As is illustrated in Fig 3, the angle  
between the first portion 22 and the second portion 23,  
respectively, is less than 90 degrees. The same applies for  
the angle between the second and third portions 23, 24.  
However, the angles may be more than 90 degrees (not  
20 shown). Further, the first 23 and third 24 portions do not  
have to be straight, but can be folded. Consequently, the  
exact design of the antenna loop 11, 21 is not fixed, and  
has to be thoroughly tested and evaluated in each specific  
case.

25 The second embodiment of the antenna device 20 shown  
in Fig. 2 comprises a bezel 28. The bezel 28 is provided  
between the antenna loop 21 and the batteries 27a, 27b, and  
is connected to the PCB 26. The bezel 28 is optional and  
utilized for fending off ESD (Electrostatic Discharge)  
30 discharges. The bezel extends from the third side of the  
PCB 26 towards the fourth side of the PCB 26. In the second  
embodiment it is made of a metal sheet, but can be made of  
any well conducting material.

In Fig. 4 a third embodiment of the invention is  
35 shown. Like numerals in Fig. 4 correspond to like numerals

of Fig. 2 according to the same pattern as was described in relation to Fig. 3. In the third embodiment, the bezel 38 is provided with bezel flanges 39a, 39b extending along the third and fourth sides of the PCB 36. The bezel flanges 39a, 39b are, via the bezel 38, also connected to the PCB 36 and improves ESD robustness without influencing the antenna performance negatively. As should be noticed, the bezel flanges 39a, 39b may be provided without the bezel 38.

To extend the ground plane of the PCB 16, 26, 36 a ground plane extender is provided in the extension of the first side of the PCB. Any well conducting material will function as the extender. The battery cell provided in a battery casing made of a conducting material, such as metal, may provide the ground plane extender. Consequently, the batteries 17a, 17b, 27a, 27b, 37a, 37b will act as an extension of the ground plane of the PCB 16, 26, 36 if they are positioned in the extension of the first side of the PCB 16, 26, 36, which is opposite the second side where the connectors 15a, 15b, 25a, 25b, 35a, 35b are connected to the PCB 16, 26, 36.

The position of the at least one battery 17a, 17b, 27a, 27b, 37a, 37b is important for the antenna performance. Although the batteries 17a, 17b, 27a, 27b, 37a, 37b are not directly connected to the ground plane of the PCB 16, 26, 36 they will act together with the ground plane of the PCB to form an extended ground plane, which is larger than the actual ground plane of the PCB. Therefore, the antenna loop 11, 21, 31 will experience a ground plane which is sufficiently large without actually providing a ground plane having an actual size to achieve a certain bandwidth to meet requirements of a certain communications protocol. Consequently, the PCB 16, 26, 36 may be decreased if the batteries 17a, 17b, 27a, 27b, 37a, 37b are provided in a position for extending the ground plane. Therefore,

the dimensioning of the antenna and the small portable  
device can be made small, and light.

The distance  $d$  between the PCB 16, 26, 36 and the batteries 17a, 17b, 27a, 27b, 37a, 37b is approximately  
5 about 1 mm in the shown embodiments. However, the distance  $d$  has to be tested and evaluated in each specific case.

A further tuning parameter of the antenna device 10, 20, 30 is that the connectors 15a, 15b, 25a, 25b, 35a, 35b should preferably be provided as close as possible to the  
10 edge of the second side of the PCB 16, 26, 36. The closer the connectors 15a, 15b, 25a, 25b, 35a, 35b are to the edge of the second side of the PCB 16, 26, 36, the more bandwidth is gained. Similarly, the first and second portions 12, 22, 32, 13, 23, 33 of the antenna loop,  
15 respectively, should preferably be provided as close as possible to the third and fourth side of the PCB 16, 26, 36, respectively. The closer said portions are to the third and fourth sides of the PCB, the more bandwidth is gained.

The antenna design according to the invention is  
20 sufficiently efficient to be adapted for communicating according to several protocols, such as Bluetooth, WLAN, GSM, UMTS, ISM etc. There are a number of tuning parameters for adapting the antenna to a specific protocol, such as the length of the antenna loop 11 (half wave antenna loop),  
25 the length  $L1$  of the first and third portions 12, 14, respectively, the length  $L2$  of the second portion 13, the length  $L3$  and width  $W1$ ,  $W2$  of the PCB 16, the length  $L4$  and width  $W3$  of the batteries 17a, 17b, the height  $H$  of the antenna loop 11 above the PCB 16, the distance  $D$  between  
30 the connectors 15a, 15b, the thickness  $T$  of the antenna loop 11, the distance  $d$  between the PCB 16 and the batteries 17a, 17b, the angle  $\alpha$  between the first and third portions 12, 14 and the connectors 15a, 15b, as is indicated in Fig. 2.

A preferred thickness of the antenna loop is about 0.1-1 mm.

The embodiment shown in Fig. 3 is adapted for communication according to the Bluetooth protocol, wherein the center frequency is around 2,4-2,5 GHz, and has the following approximate dimensions:

L1	22 mm
L2	13.4 mm
L3	38 mm
L4	20 mm
W1	10 mm
W2	16 mm
W3	16.5 mm (together)
D	7.5 mm
T	0.1-1 mm
W4	2.3 mm
H	5.1 mm
d	1 mm
$\alpha$	50°

In Fig. 5 a log-mag diagram and in Fig. 6 a Smith chart of a measurement made on a prototype of the embodiment of Fig. 3 are shown. The measurement is made with a human body behind the antenna device in order to make the measurement as realistic as possible. From Fig. 5 and Fig 6 of a measurement made on a prototype of the embodiment of Fig. 3 it can be concluded that the antenna device shows good performance, meeting the bandwidth requirements of the Bluetooth protocol.

If the height H is increased, bandwidth is gained. However, with an increased height H the antenna will be more sensitive to the environment, such as the microphone 3, the loudspeaker 4, the user of the headset 1, and other electronic components of the headset, and vice versa. Also,

~~in alternative embodiments the first, second and third~~  
portions of the antenna loop may be provided in different planes. Each portion can be provided in a different plane if preferred.

5       As should be noted, the antenna has an input impedance of 50 ohm, and therefore no impedance matching circuits are needed to match the antenna to the RF circuitry of the PCB.

10       The present invention has been described with reference to a few alternative embodiments. However, the embodiments are only for exemplifying purposes and should not be taken as limiting the scope of the invention, which is best defined by the appended independent claims. All dimensions of the antenna device according to the invention  
15 have to be thoroughly tested and evaluated in each specific case. Further, the invention has been described in relation to a headset. However, the invention can be adapted to and utilized in any small portable device. Also, the antenna device can be used in other portable devices, such as  
20 mobile telephones, mobile terminals, smartphones, or the like, where a small and efficient antenna design is preferred.

CFO-Munich  
22

26. Aug. 2002

## CLAIMS

1. An antenna device (10, 20, 30) for a portable device (1), the antenna device (10, 20, 30) comprising an antenna loop (11, 21, 31) of conducting material having first and second ends to be connected to radio frequency (RF) circuitry and a ground plane of a PCB (16, 26, 36), respectively, characterized in that the antenna device (10, 20, 30) further comprises a ground plane extender (17a, 17b, 27a, 27b, 37a, 37b) positioned in the extension of a first side of the PCB (16, 26, 36).

2. The antenna device according to claim 1, wherein the antenna loop comprises first and second connectors (15a, 15b, 25a, 25b, 35a, 35b) provided at a second side of the PCB (16, 26, 36) for connecting the antenna loop (11, 21, 31) to the RF circuitry and the ground plane of the PCB (16, 26, 36), respectively.

3. The antenna device according to claim 1 or 2, wherein the antenna loop (11, 21, 31) further comprises:  
a first portion (12) having a first and a second end, said portion (12, 22, 32) extending in a first direction along a third side of the PCB (16, 26, 36), the first end being connected to the RF circuitry of the PCB (16, 26, 36);

a second portion (13, 23, 33) having a first and a second end, the first end of the second portion (13, 23, 33) being connected to the second end of the first portion (12, 22, 32), said second portion extending in a second direction from the third side of the PCB (16, 26, 36) towards a fourth side thereof, which is opposite said third side; and

a third portion (14, 24, 34) having a first and a second end, the first end of the third portion (14, 24, 34) being connected to the second end of the second portion

(13, 23, 33) and the second end of the third portion (14, 24, 34) being connected to the ground plane of the PCB (16, 26, 36), said third portion (14, 24, 34) extending in the opposite direction of said first direction along said  
5 fourth side of the PCB (16, 26, 36).

4. The antenna device according to any of the previous claims, wherein the PCB (16, 26, 36) is a multi-layer PCB having one layer used as a dedicated RF ground  
10 plane, which also provides the ground plane of the antenna device (10, 20, 30).

5. The antenna device according to any of the previous claims, wherein the antenna extender is at least  
15 one battery casing (17a, 17b, 27a, 27b, 37a, 37b) of a battery cell having a position to serve as an extension of the ground plane of the PCB (16, 26, 36).

6. The antenna device according to any of the previous claims, wherein the antenna loop (11, 21, 31) is  
20 positioned opposite a first or a second surface of the PCB (16, 26, 36).

7. The antenna device according to any of the previous claims, wherein the conductive material of the  
25 antenna loop (11, 21, 31) is metal.

8. The antenna according to claim 6, wherein the antenna loop (11, 21, 31) is a U-shaped dielectric having  
30 the antenna shape etched into the dielectric.

9. The antenna device according to claim 4 or 5, wherein the antenna loop (11, 21, 31) is provided inside the PCB (16, 26, 36).

10. The antenna device according to any of the previous claims, wherein a bezel (28, 38), which is connected to the PCB, extends from the third side of the PCB (26, 36) towards the fourth side of the PCB, and/or  
5 bezel flanges (39a, 39b) connected to said ground plane extends along the third and fourth sides of the PCB.

11. A multi-layer printed circuit board (PCB), characterized by an antenna device according to any of the  
10 claims 1-10.

12. A portable communication device, characterized by an antenna according to any of the claims 1-10.

15 13. The portable communication device according to claim 12, wherein the apparatus is a headset (1).

EPO - Munich  
22  
26. Aug. 2002

#### ABSTRACT

An antenna device for a portable device has an antenna loop (11) of conducting material to be connected to radio circuitry in the portable device. The antenna loop  
5 (11) is positioned opposite a ground plane of a PCB (16). Also, the antenna device also comprises at least one battery, which is positioned in the extension of a first side of the PCB (16), and acts as an extension of the  
10 ground plane of the PCB (16).

To be published together with Fig. 2

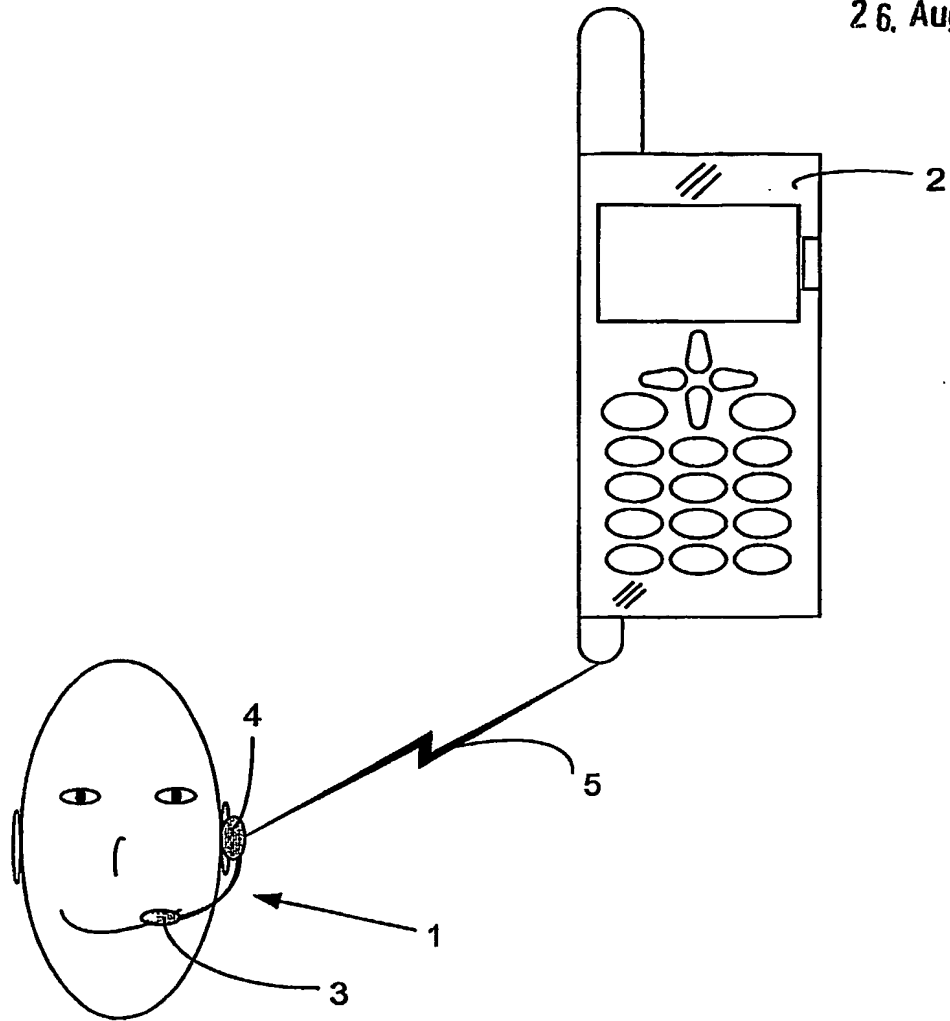


FIG. 1

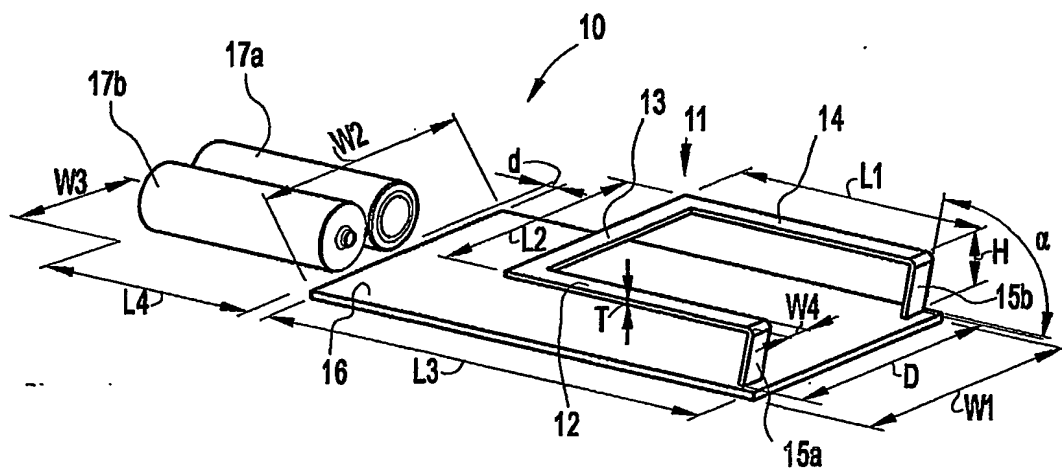


FIG. 2

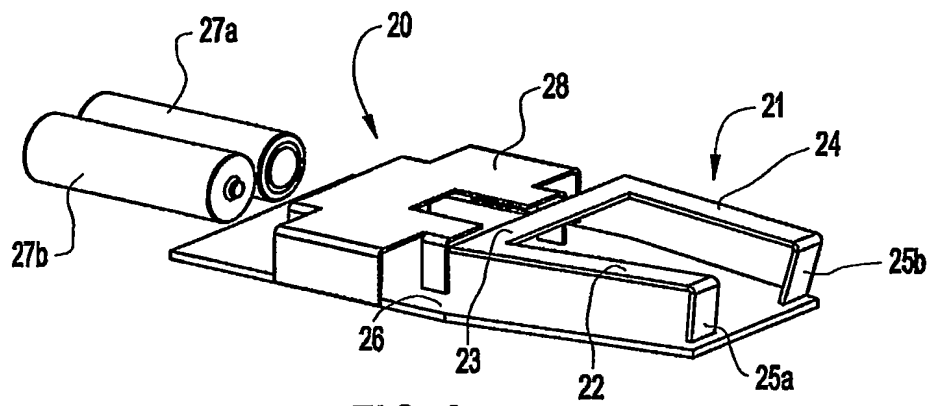


FIG. 3

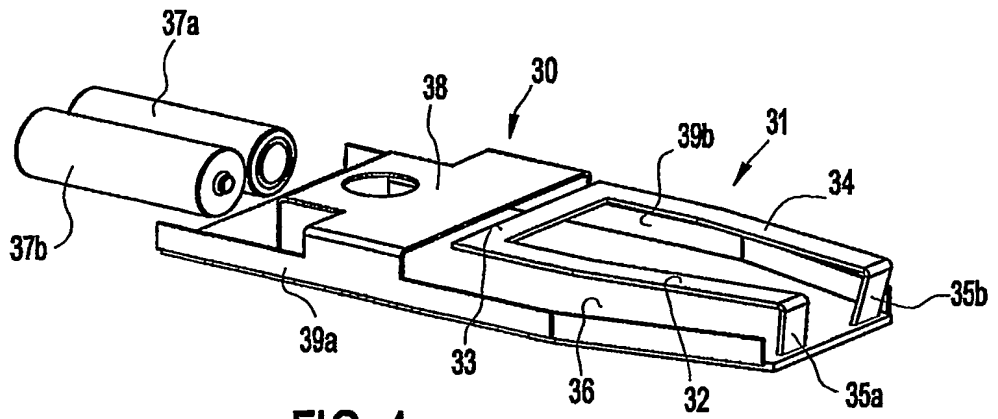


FIG. 4

4/4

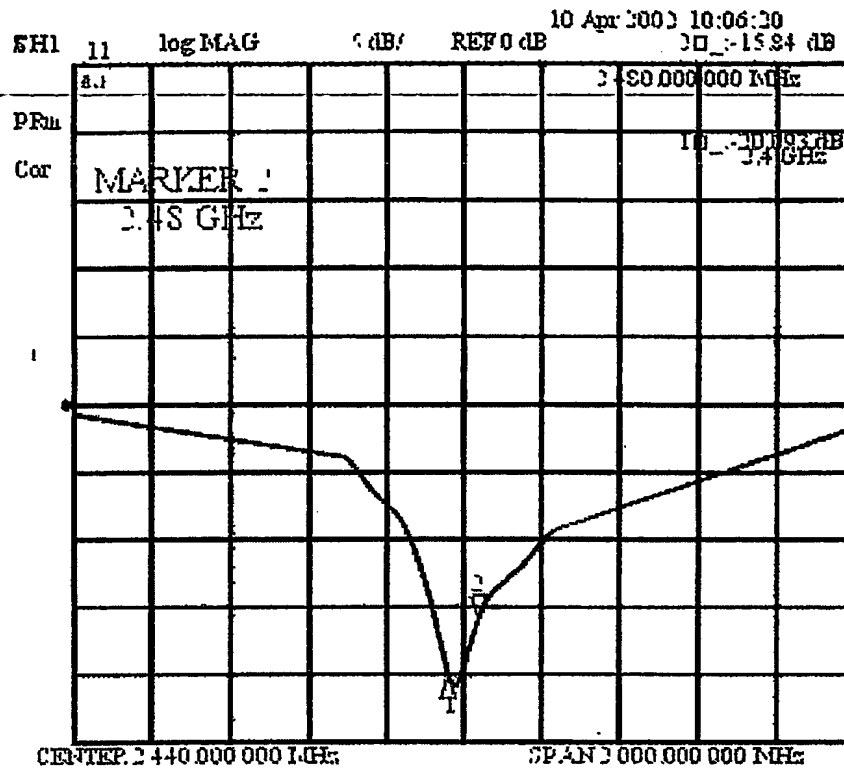


FIG. 5

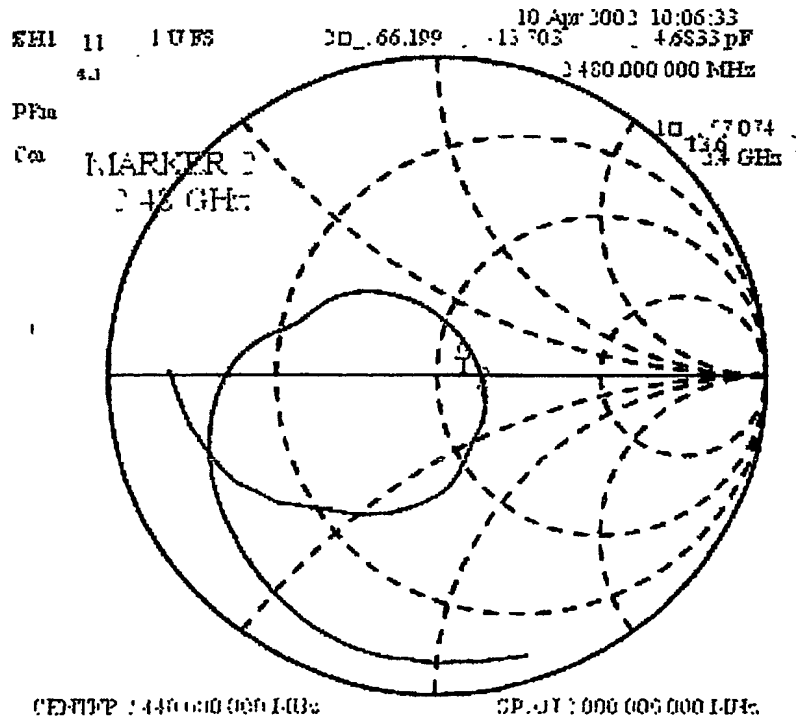


FIG. 6

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

☐ BLACK BORDERS

☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES

☐ FADED TEXT OR DRAWING

☐ BLURRED OR ILLEGIBLE TEXT OR DRAWING

☐ SKEWED/SLANTED IMAGES

☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS

☐ GRAY SCALE DOCUMENTS

☒ LINES OR MARKS ON ORIGINAL DOCUMENT

☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY

☐ OTHER: \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**